


PROTEC PROSICON® EPS 200

High Temp Silicone Flangeless Plugs

PROTEC
PLASTICS

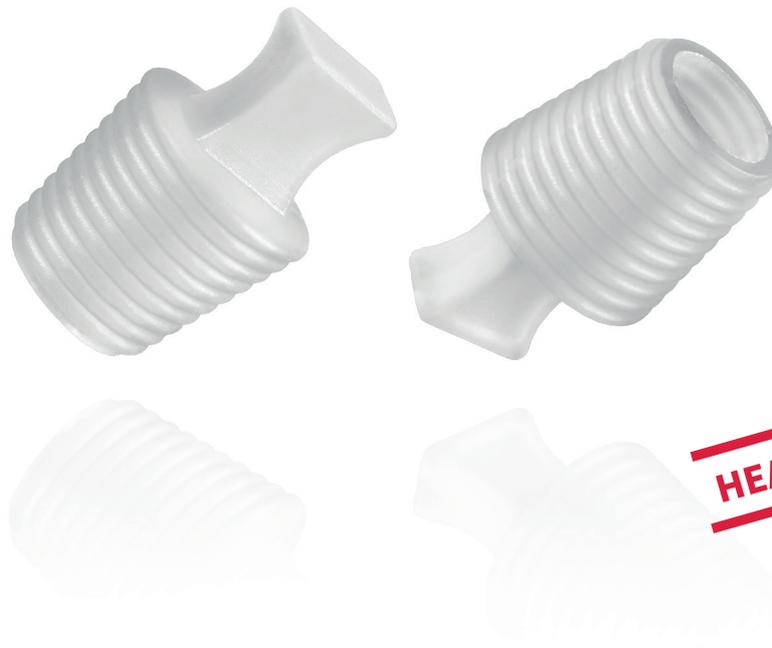

IHR PROSICON® PRODUKTVORTEIL. KONSEQUENTE DAURTIEFPREISE.

HIGH TEMP SILICONE FLANGELESS PLUGS:

Flangeless Plugs have a tapered design and hollow core to allow a single plug to be used in both threaded or non-threaded holes of varying sizes.

Protect bore holes and internal threads without masking surrounding area.

Recommended for Powder coating, e-coating, plating & anodizing.

MATERIAL:

Prosicon® Silicone rubber 55 shore A withstands temperatures up to max. 316 ° C / 4 hours. On request also in EPDM material up to max. 177 ° C available.

BLU SIGNATURE® PRODUCT CODE:

Reusable

COLOR:

Special color runs available on request.

TECHNISCHE SAUBERKEIT:

Prosicon® Silikon Produkte werden getempert. Dieser Vorgang verbessert die Dimensionsstabilität und verhindert das Ausschwitzen von Weichmachern bei Kundenanwendung unter großer Hitze.

WERKSTOFF – EIGENSCHAFTEN:

Prosicon® Silikon Kautschuk besitzt sehr gute Chemikalien- und Säurebeständigkeit und ist mehrmals zu verwenden, ohne dass sich das Material verhärtet.

ANWENDUNG:

Ideale Abdeckelemente bei Pulverbeschichtung, Nasslackieren, KTL, Anodisieren, Galvanisieren und Eloxieren. Extrem temperaturbeständig, robust, vielseitig und zeitsparend.

SONDERANFERTIGUNGEN IN REKORDZEIT:


On request we develop and produce individually tailored solutions along with the standard items of this range: If you require additional dimensions, different materials and new colours.

We would be pleased to assist you.

Individuell.	Für Ihren speziellen Anwendungsfall
Hi-Speed.	Rapid Prototyping. Schnelle Funktionsmuster
Unschlagbar.	Extrem niedrige Werkzeugkosten

PROTEC PROSICON® EPS 200

High Temp Silicone Flangeless Plugs

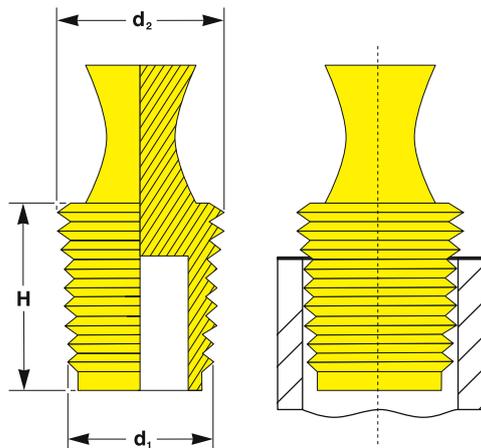

DIMENSIONS

All dimensions in mm

Dimensions			Shore A	Standard Pack	Reference No.
d ₁	d ₂	H			
2.01	3.99	19.05	50	500	EPS 200 / 0157-0079
3.99	5.99	25.40	80	250	EPS 200 / 0236-0157
4.78	10.54	25.40	70	1.000	EPS 200 / 0415-0188
5.99	8.00	25.40	80	250	EPS 200 / 0315-0236
7.95	10.31	25.40	75	250	EPS 200 / 0406-0313
8.00	10.01	25.40	80	250	EPS 200 / 0394-0315
10.01	11.99	25.40	75	250	EPS 200 / 0472-0394
10.31	11.89	25.40	75	250	EPS 200 / 0468-0406
10.54	16.28	25.40	70	500	EPS 200 / 0641-0415
11.89	14.27	25.40	75	250	EPS 200 / 0562-0468
11.99	14.00	25.40	75	250	EPS 200 / 0551-0472
14.00	16.00	25.40	75	250	EPS 200 / 0630-0551
14.27	15.88	25.40	75	250	EPS 200 / 0625-0562
15.88	18.24	25.40	75	250	EPS 200 / 0718-0625
16.00	18.01	25.40	75	250	EPS 200 / 0709-0630
16.28	22.05	25.40	70	100	EPS 200 / 0868-0641
18.01	19.99	25.40	70	100	EPS 200 / 0787-0709
18.24	19.05	25.40	70	250	EPS 200 / 0750-0718
19.05	22.23	25.40	70	100	EPS 200 / 0875-0750
19.99	22.50	25.40	70	100	EPS 200 / 0886-0787
22.05	27.79	25.40	70	100	EPS 200 / 1094-0868
22.23	25.40	25.40	65	100	EPS 200 / 1000-0875
22.50	24.00	25.40	70	100	EPS 200 / 0945-0886
24.00	26.01	25.40	65	100	EPS 200 / 1024-0945
25.40	28.58	25.40	65	100	EPS 200 / 1125-1000
26.01	27.99	25.40	65	100	EPS 200 / 1102-1024
27.79	33.53	25.40	70	100	EPS 200 / 1320-1094
28.58	31.75	25.40	65	100	EPS 200 / 1250-1125
33.53	39.29	25.40	70	100	EPS 200 / 1547-1320
39.29	45.06	25.40	70	100	EPS 200 / 1774-1547
45.06	50.80	25.40	70	100	EPS 200 / 2000-1774

Should your requirements not be shown please ask for a separate quotation.
 PROTEC products and specifications are subject to improvement and change without notice.