



IHR PROSICON® PRODUKTVORTEIL. KONSEQUENTE DAUERTIEFPREISE.

HIGH TEMP SILICONE COMPRESSION PLUGS:

Compression Plugs are designed to mask plain holes and internal threads.

Recommended for Powder coating, e-coating, plating & anodizing.

MATERIAL:

Prosicon® Silicone rubber 55 shore A withstands temperatures up to max. 316 ° C / 4 hours. On request also in EPDM material up to max. 177 ° C available.

BLU SIGNATURE® PRODUCT CODE:

Reusable

COLOR:

Special color runs available on request.

TECHNISCHE SAUBERKEIT:

Prosicon® Silikon Produkte werden getempert. Dieser Vorgang verbessert die Dimensionsstabilität und verhindert das Ausschwitzen von Weichmachern bei Kundenanwendung unter großer Hitze.

WERKSTOFF – EIGENSCHAFTEN:

Prosicon® Silikon Kautschuk besitzt sehr gute Chemikalien- und Säurebeständigkeit und ist mehrmals zu verwenden, ohne dass sich das Material verhärtet.

ANWENDUNG:

Ideale Abdeckelemente bei Pulverbeschichtung, Nasslackieren, KTL, Anodisieren, Galvanisieren und Eloxieren. Extrem temperaturbeständig, robust, vielseitig und zeitsparend.

SONDERANFERTIGUNGEN IN REKORDZEIT:

On request we develop and produce individually tailored solutions along with the standard items of this range: If you require additional dimensions, different materials and new colours.

We would be pleased to assist you.

Individuell.

Für Ihren speziellen Anwendungsfall

Hi-Speed.


Rapid Prototyping. Schnelle Funktionsmuster

Unschlagbar.

Extrem niedrige Werkzeugkosten

PROTEC PROSICON® EPS 425

High Temp Silicone Compression Plugs

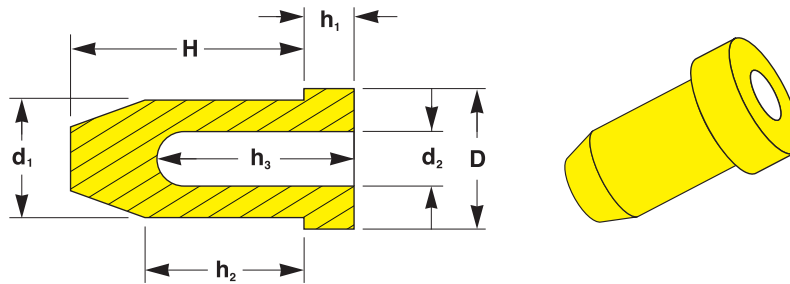

DIMENSIONS

All dimensions in mm

d ₁	d ₂	D	H	h ₁	h ₂	h ₃	Reference No.
5.94	3.18	9.53	13.49	3.18	9.53	13.49	EPS 425 / 0234
6.35	3.18	8.89	13.49	3.18	9.53	12.70	EPS 425 / 0250
6.90	3.00	8.40	12.00	2.50	9.00	5.00	EPS 425 / 0272
7.24	3.86	11.07	14.35	3.56	10.72	13.44	EPS 425 / 0285
8.57	3.96	12.70	15.09	3.18	11.13	14.30	EPS 425 / 0338
7.80	3.50	9.20	14.00	2.50	10.25	14.50	EPS 425 / 0307
7.95	3.81	10.95	14.68	3.18	10.54	14.27	EPS 425 / 0313
8.89	4.75	12.70	17.25	4.75	11.43	16.51	EPS 425 / 0350
10.44	4.50	16.94	14.80	3.50	11.27	15.30	EPS 425 / 0411
10.50	4.50	12.70	16.00	3.50	12.43	16.50	EPS 425 / 0413
11.95	5.56	14.30	19.06	4.76	12.70	16.69	EPS 425 / 0471
13.45	5.00	15.35	18.00	3.50	12.68	18.50	EPS 425 / 0530
15.94	7.95	19.05	23.84	4.76	17.48	23.04	EPS 425 / 0628
17.90	7.50	22.00	25.40	5.00	18.69	26.40	EPS 425 / 0705
18.35	20.85	22.00	19.85	5.00	8.00	20.85	EPS 425 / 0722
19.11	8.74	21.34	22.24	4.76	15.88	21.44	EPS 425 / 0753
21.00	11.00	25.40	23.80	5.00	15.95	22.80	EPS 425 / 0827
21.03	9.63	25.40	24.13	5.26	15.24	24.13	EPS 425 / 0828
22.28	9.58	25.40	22.23	6.35	15.88	22.23	EPS 425 / 0877
22.42	9.53	25.40	23.83	4.93	17.48	23.19	EPS 425 / 0883
27.43	15.24	32.77	22.23	6.35	15.88	22.61	EPS 425 / 1080
28.45	11.91	34.93	34.93	6.35	26.99	33.34	EPS 425 / 1120
38.35	24.38	43.69	28.45	6.86	22.10	28.58	EPS 425 / 1510

Should your requirements not be shown please ask for a separate quotation.
PROTEC products and specifications are subject to improvement and change without notice.