


PROTEC PROSICON® EPS 860

Heat-resistant Silicone Round Tubing- metric

PROTEC
PLASTICS

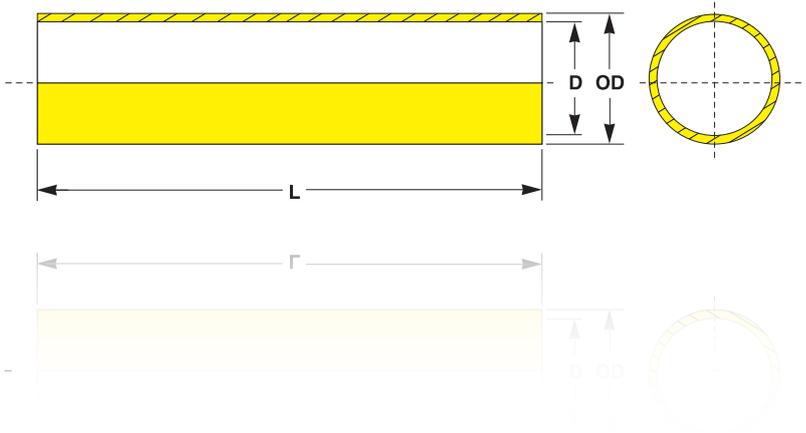

IHR PROSICON® PRODUKTVORTEIL. KONSEQUENZ

HEAT-RESISTANT SILICONE ROUND TUBING- METRIC:

As an alternative to caps, the silicone hose is used to cover threaded bolts, screws or bolts in excess length. Especially in occasions when many different lengths have to be covered with the same diameter.

Available in large range of diameters.

Recommended for Powder coating, e-coating, plating & anodizing.

MATERIAL:

Prosicon® Silicone rubber 55 shore A withstands temperatures up to max. 316 ° C / 4 hours. On request also in EPDM material up to max. 177 ° C available.

BLU SIGNATURE® PRODUCT CODE:

Reusable

COLOR:

Special color runs available on request.

TECHNISCHE SAUBERKEIT:

Prosicon® Silikon Produkte werden getempert. Dieser Vorgang verbessert die Dimensionsstabilität und verhindert das Ausschwitzen von Weichmachern bei Kundenanwendung unter großer Hitze.

WERKSTOFF – EIGENSCHAFTEN:

Prosicon® Silikon Kautschuk besitzt sehr gute Chemikalien- und Säurebeständigkeit und ist mehrmals zu verwenden, ohne dass sich das Material verhärtet.

SONDERANFERTIGUNGEN IN REKORDZEIT:

On request we develop and produce individually tailored solutions along with the standard items of this range: If you require additional dimensions, different materials and new colours.

We would be pleased to assist you.

Individuell.	Für Ihren speziellen Anwendungsfall
Hi-Speed.	Rapid Prototyping. Schnelle Funktionsmuster
Unschlagbar.	Extrem niedrige Werkzeugkosten

PROTEC PROSICON® EPS 860

Heat-resistant Silicone Round Tubing- metric



DIMENSIONS

All dimensions in mm

Dimensions			Reference No.
D	OD	L (Metre)	
2.00	5.00	25.00	EPS 860 / 02/05
2.80	4.80	25.00	EPS 860 / 2.80/4.80
2.80	5.80	25.00	EPS 860 / 2.80/5.80
3.00	5.00	25.00	EPS 860 / 03/05
3.00	6.00	25.00	EPS 860 / 03/06
3.50	5.50	25.00	EPS 860 / 3.50/5.50
3.80	5.80	25.00	EPS 860 / 3.80/5.80
4.00	5.00	25.00	EPS 860 / 04/05
4.00	7.00	25.00	EPS 860 / 04/07
4.80	7.20	25.00	EPS 860 / 4.80/7.20
5.00	8.00	25.00	EPS 860 / 05/08
5.50	7.50	25.00	EPS 860 / 5.50/7.50
5.80	8.20	25.00	EPS 860 / 5.80/8.20
6.00	9.00	25.00	EPS 860 / 06/09
7.00	10.00	25.00	EPS 860 / 07/10
7.50	10.50	25.00	EPS 860 / 7.50/10.50
7.80	10.60	25.00	EPS 860 / 7.80/10.60
8.00	11.00	25.00	EPS 860 / 08/11
8.75	11.75	25.00	EPS 860 / 8.75/11.75
9.00	12.00	25.00	EPS 860 / 09/12
9.00	13.00	25.00	EPS 860 / 09/13
9.80	12.60	25.00	EPS 860 / 9.8/12.6
10.00	13.00	25.00	EPS 860 / 10/13
10.00	14.00	25.00	EPS 860 / 10/14
11.00	14.00	25.00	EPS 860 / 11/14
11.80	14.80	25.00	EPS 860 / 11.8/14.8
12.00	15.00	25.00	EPS 860 / 12/15
12.00	16.00	25.00	EPS 860 / 12/16
12.00	16.50	25.00	EPS 860 / 12.0/16.5
13.00	16.00	25.00	EPS 860 / 13/16
14.00	18.00	25.00	EPS 860 / 14/18
14.00	20.00	25.00	EPS 860 / 14/20
15.00	19.00	25.00	EPS 860 / 15/19
15.00	21.00	25.00	EPS 860 / 15/21
16.00	20.00	25.00	EPS 860 / 16/20
16.00	22.00	25.00	EPS 860 / 16/22
17.00	20.00	25.00	EPS 860 / 17/20
17.00	21.00	25.00	EPS 860 / 17/21
18.00	22.00	25.00	EPS 860 / 18/22
18.00	25.00	25.00	EPS 860 / 18/25
20.00	24.00	25.00	EPS 860 / 20/24
20.00	25.00	25.00	EPS 860 / 20/25
22.00	26.00	25.00	EPS 860 / 22/26
25.00	29.00	25.00	EPS 860 / 25/29
25.00	30.00	25.00	EPS 860 / 25/30
28.60	31.60	25.00	EPS 860 / 28.6/31.6
30.00	34.00	25.00	EPS 860 / 30/34
41.30	44.30	25.00	EPS 860 / 41.3/44.3

Should your requirements not be shown please ask for a separate quotation.
 PROTEC products and specifications are subject to improvement and change without notice.