


Spray-out Control Flange Safety Rings, Polypropylene

Designed for installation over welding neck flange joints to prevent injury and damage in the event of a hazardous sprayout
DN 15 – DN 200

EX STOCK
400m
Parts
DELIVERY SERVICE

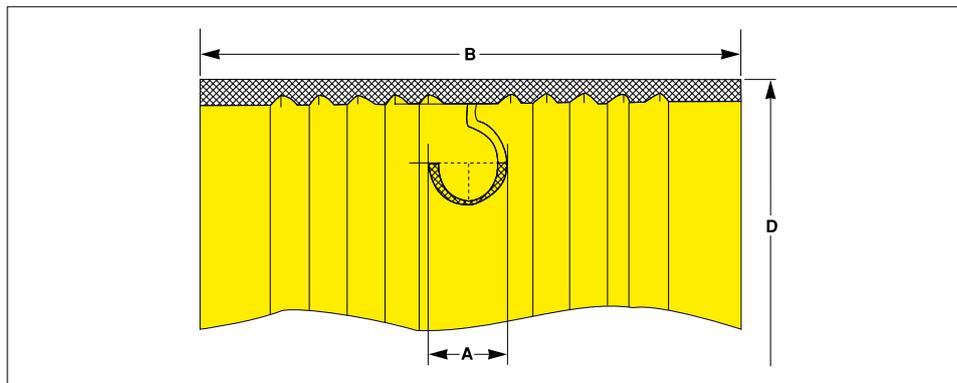

DIN 2632 PN 10 DIN 2634 PN 25
DIN 2633 PN 16 DIN 2635 PN 40

All dimensions in mm

Nominal size	Nominal Pressure				D				A Internal ridge width	B Ring width	Reference-No.
	Flange diameter				Flange diameter						
	PN 10	PN 16	PN 25	PN 40	PN 10	PN 16	PN 25	PN 40			
DN 15	✓	✓	✓	✓	95.0	95.0	95.0	95.0	7.0	50.0	SSR-DN 15 / PN 10-40
DN 20	✓	✓	✓	✓	105.0	105.0	105.0	105.0	7.0	50.0	SSR-DN 20 / PN 10-40
DN 25	✓	✓	✓	✓	115.0	115.0	115.0	115.0	7.0	50.0	SSR-DN 25 / PN 10-40
DN 32	✓	✓	✓	✓	140.0	140.0	140.0	140.0	7.0	50.0	SSR-DN 32 / PN 10-40
DN 40	✓	✓	✓	✓	150.0	150.0	150.0	150.0	7.0	50.0	SSR-DN 40 / PN 10-40
DN 50	✓	✓	✓	✓	165.0	165.0	165.0	165.0	9.9	48.0	SSR-DN 50 / PN 10-40
DN 65	✓	✓	✓	✓	185.0	185.0	185.0	185.0	9.0	50.0	SSR-DN 65 / PN 10-40
DN 80	✓	✓	✓	✓	200.0	200.0	200.0	200.0	9.0	50.0	SSR-DN 80 / PN 10-40
DN 100	✓	✓			220.0	220.0			9.0	50.0	SSR-DN 100 / PN 10-16
DN 125	✓	✓			250.0	250.0			9.0	50.0	SSR-DN 125 / PN 10-16
DN 150	✓	✓			285.0	285.0			9.0	50.0	SSR-DN 150 / PN 10-16
DN 200	✓	✓			340.0	340.0			13.0	60.0	SSR-DN 200 / PN 10-16

Material :
Polypropylene

Int. Patent
Designed for installation over welding neck flange joints to prevent injury and damage in the event of a hazardous sprayout.

- Quick-Fit Installation
- Easy Removal for Inspection
- No Tools required
- Superior Quality
- Exceptionally Low Prices

Think Plastic. Go Protec.®



ANSI

All dimensions in mm

Nominal size	Nominal Pressure 150 lb/sq.in.	D		A Internal ridge width	B Ring width	Reference-No.
		Flange diameter	Flange diameter			
1."	✓	4.25 inch	108.0	7.0	50.0	SSR ANSI 1." – 150
2."	✓	6.00 inch	152.4	7.0	50.0	SSR ANSI 2." – 150
3."	✓	7.50 inch	190.5	7.0	50.0	SSR ANSI 3." – 150
4."	✓	9.00 inch	228.6	7.0	50.0	SSR ANSI 4." – 150
6."	✓	11.00 inch	279.4	7.0	50.0	SSR ANSI 6." – 150

Should your requirements not be shown please ask for separate quotation.
PROTEC products and specifications are subject to improvement and change without notice.

Spray-out Control Flange Safety Rings, Polypropylene

SSR 3500

Designed for installation over welding neck flange joints to prevent injury and damage in the event of a hazardous sprayout
DN 15 – DN 200


TRIPLE ADVANTAGE of PROTEC DURA-SAFE®

QUALITY. Is designed for installation over welding neck flange joints to prevent injury and damage in the event of a hazardous sprayout. Sizes up to DN 200.

Design: Circular cover with adjustable locking clip and flange fitting internal internal slotted ridge.

AVAILABILITY. With over 400 million moulded components shipped from our Oststeinbek / Hamburg logistics center we provide the fastest on time delivery service to all markets and industries.

PHILOSOPHY. Innovative protective closures at the best price in the market.

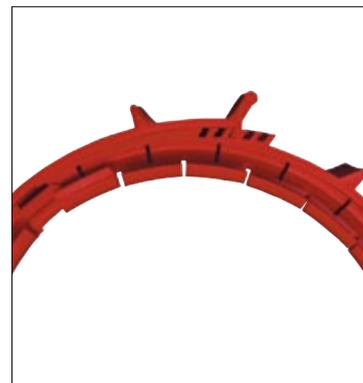

Int. Patent

DURA-SAFE®

Material :
Polypropylene

Individual Productions :
On request we develop and produce individually tailored solutions next to the standard items of this range: additional dimensions, different materials and new colours

We would be pleased to advise you.

Think Plastic. Go Protec.®

PROTEC
PLASTICS