

PROTEC **PROSICON®** EPS 625

High Temperature Masking Silicone Flanged Caps

PROTEC
PLASTICS



IHR PROSICON® PRODUKTVORTEIL. KONSEQUENTE DAUERTIEFPREISE.

HEAT RESISTANT!

HIGH TEMPERATURE MASKING SILICONE FLANGED CAPS:

Cylindrical shaft design. Flanged caps are designed to mask threaded holes; they will mask off the hole and the first thread of the hole.

Round profile, closed on one side. Dome top with central flange. Can be used as a plug or cap. Recommended for Powder coating, e-coating, plating & anodizing.

MATERIAL:

Prosicon® Silikon Kautschuk 55 Shore A, hitzebeständig bis max. 316° C. Auf Anfrage auch in Werkstoff EPDM bis max. 177° C lieferbar.

BLU SIGNATURE® PRODUCT CODE:

Reusable

COLOR:

Special color runs available on request.

TECHNISCHE SAUBERKEIT:

Prosicon® Silikon Produkte werden getempert. Dieser Vorgang verbessert die Dimensionsstabilität und verhindert das Aus-schwitzen von Weichmachern bei Kundenanwendung unter großer Hitze.

WERKSTOFF – EIGENSCHAFTEN:

Prosicon® Silikon Kautschuk besitzt sehr gute Chemikalien- und Säurebeständigkeit und ist mehrmals zu verwenden, ohne dass sich das Material verhärtet.

ANWENDUNG:

Ideale Abdeckelemente bei Pulverbeschichtung, Nasslackieren, KTL, Anodisieren, Galvanisieren und Eloxieren. Extrem temperaturbeständig, robust, vielseitig und zeitsparend.

SONDERANFERTIGUNGEN IN REKORDZEIT:

On request we develop and produce individually tailored solutions along with the standard items of this range: If you require additional dimensions, different materials and new colours. We would be pleased to assist you.

Individuell.

Für Ihren speziellen Anwendungsfall

Hi-Speed.


Rapid Prototyping. Schnelle Funktionsmuster

Unschlagbar.

Extrem niedrige Werkzeugkosten

PROTEC PROSICON® EPS 625

High Temperature Masking Silicone Flanged Caps

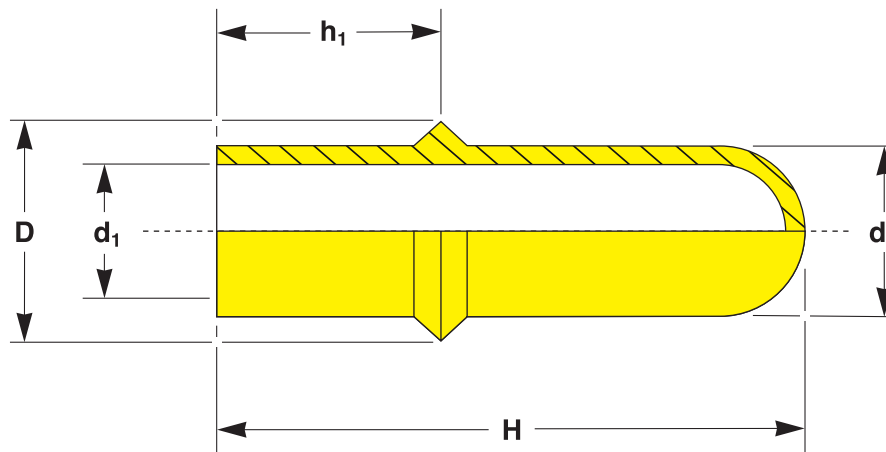

DIMENSIONS

All dimensions in mm

Dimensions					Standard Pack	Color	Reference No.
d ₁	d ₂	D	H	h ₁			
4.39	7.39	11.99	30.99	11.99	250	yellow	EPS 625 / M 8
5.69	8.71	14.71	32.00	13.00	250	pink	EPS 625 / M10
7.65	10.69	15.80	33.02	14.00	250	natural	EPS 625 / M12
8.00	10.69	15.80	45.66	14.00	250	natural	EPS 625 / M12L
10.69	13.69	18.01	34.04	15.01	250	grey	EPS 625 / M14
9.55	12.70	17.53	57.15	17.02	250	natural	EPS 625 / M14L

Should your requirements not be shown please ask for a separate quotation.
PROTEC products and specifications are subject to improvement and change without notice.